


通し軸形クラッチ

JC-0.6、1.2、2.5、5

形 式	JC-0.6	JC-1.2	JC-2.5	JC-5
静摩擦トルク Nm	6	12	25	50
定格電圧 DC-V	24	24	24	24
消費電力 W(at75°C)	8	11	16	23
質 量 kg	0.8	1.4	2.6	4.2

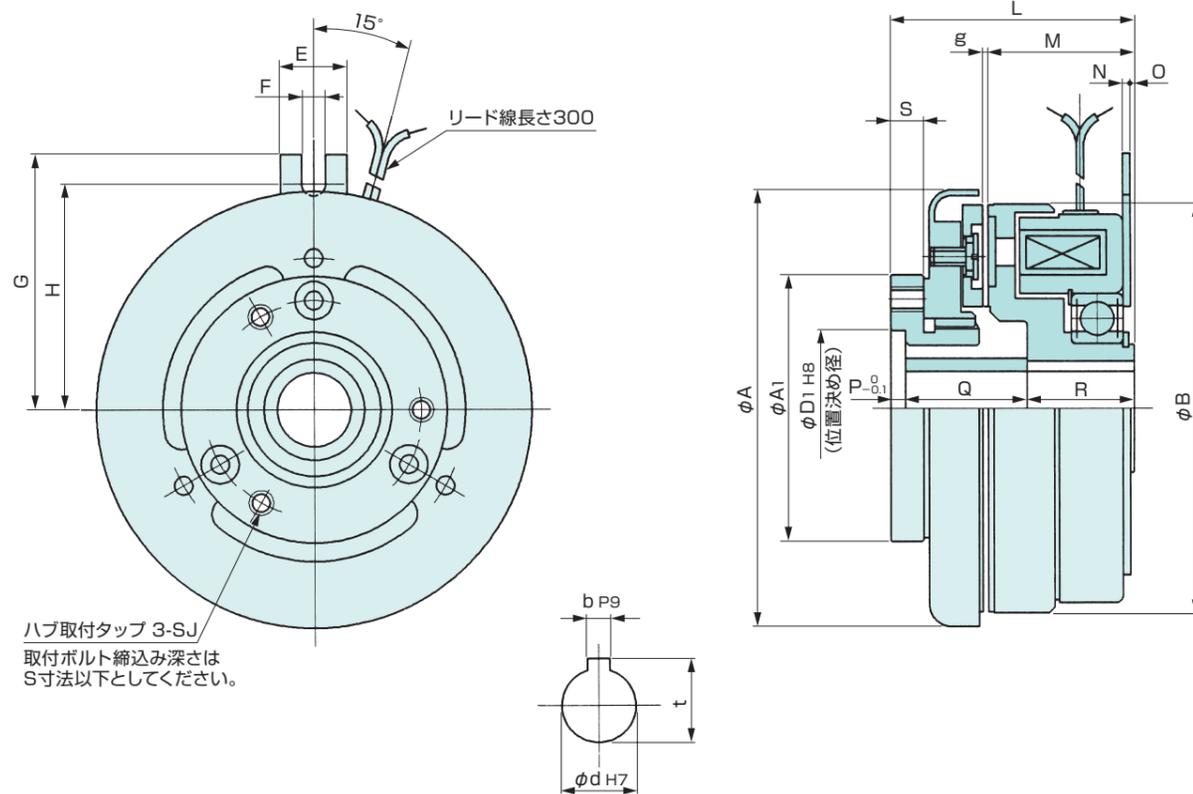

単位: mm

形 式	JC-0.6	JC-1.2	JC-2.5	JC-5	
径方向	A	76	96	118	145
	A ₁	51	58	72	87
	B	70.3	90.4	110.5	135.6
	D ₁	28	32	42	52
	E	14	16	18	20
	F	4.5	5.5	6.5	6.5
	G	46	57	69	82
	H	39.5	50	61	74
軸方向	L	47	53	66	73
	M	29	32	40.5	43.5
	N	1.6	1.6	2.0	2.6


単位: mm

形 式	JC-0.6	JC-1.2	JC-2.5	JC-5	
軸方向	O	1	1	1	1
	P	3	3	4	4
	Q	23	27	33	37
	R	21	23	29	32
	S	6.5	7.5	9	10
	g	0.4	0.4	0.5	0.5
	取付SJ	ピッチ円直径 タップ	M4	M5	M6
軸穴	d	12	15	20	25
	b	4	5	6	8
	t	13.8 ^{+0.1} ₀	17.3 ^{+0.1} ₀	22.8 ^{+0.1} ₀	28.3 ^{+0.2} ₀

通し軸形クラッチ

JC-10、20、40

形 式	JC-10	JC-20	JC-40
静摩擦トルク Nm	100	200	400
定格電圧 DC-V	24	24	24
消費電力 W(at75°C)	33	40	50
質 量 kg	8.7	17.5	32.5

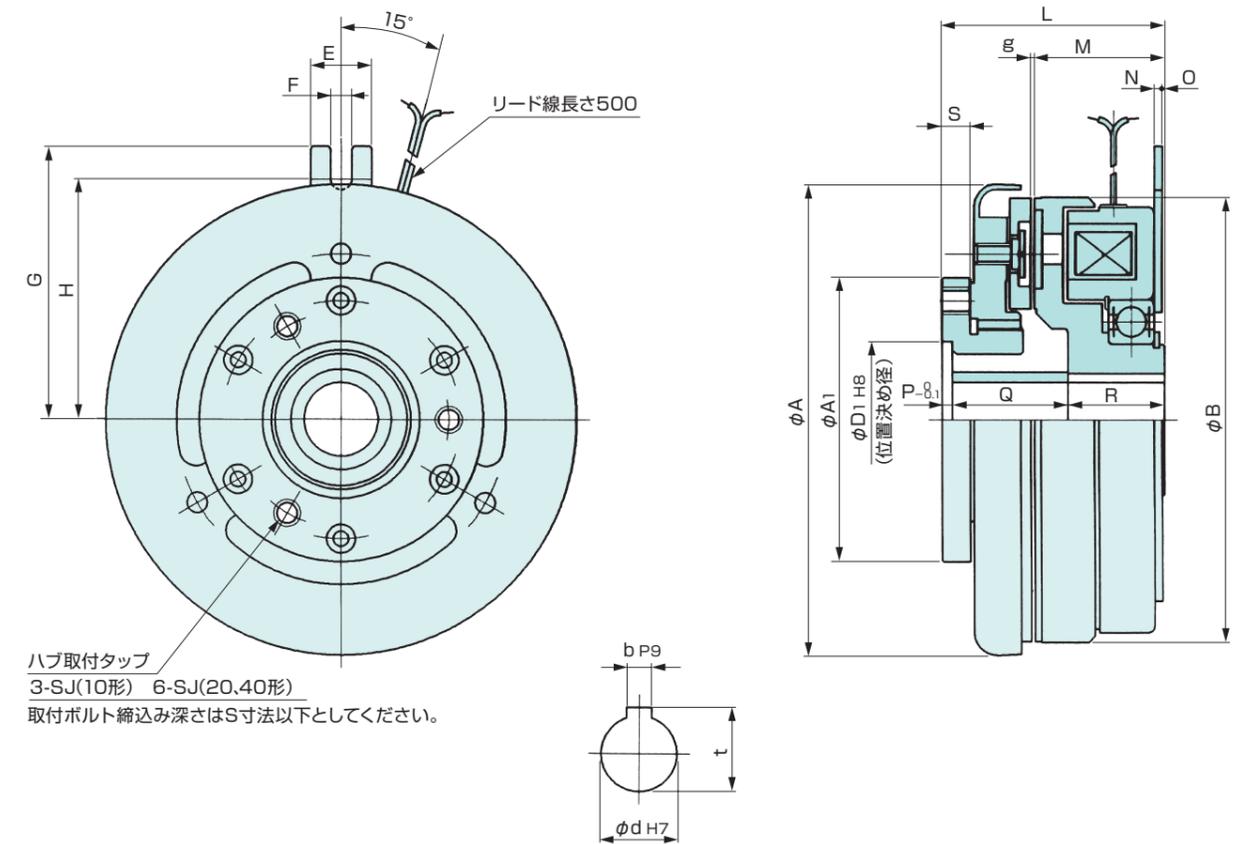

単位: mm

形 式	JC-10	JC-20	JC-40	
径方向	A	186	236	288
	A ₁	112	140	168
	B	175.7	219	271
	D ₁	62	80	90
	E	24	26	30
	F	8.5	8.5	10.5
	G	108	130	160
	H	95	118	145
	N	3.2	3.2	3.2
軸方向	L	87.5	106	127
	M	52	60.5	71

単位: mm

形 式	JC-10	JC-20	JC-40	
軸方向	O	1	2	2
	P	4	5	5
	Q	45.5	56.5	70
	R	38	44.5	52
	S	11	13	15
	g	0.5	0.6	0.6
	取付SJ	ピッチ円直径 タップ	M10	M10
軸穴	d	30	40	50
	b	10	12	16
	t	33.3 ^{+0.2} ₀	43.3 ^{+0.2} ₀	54.3 ^{+0.2} ₀