


突合せ軸形クラッチ

JCC-0.6、1.2、2.5、5

形 式	JCC-0.6	JCC-1.2	JCC-2.5	JCC-5
静摩擦トルク Nm	6	12	25	50
定格電圧 DC-V	24	24	24	24
消費電力 W(at75°C)	8	11	16	23
質 量 kg	0.85	1.5	2.7	4.3

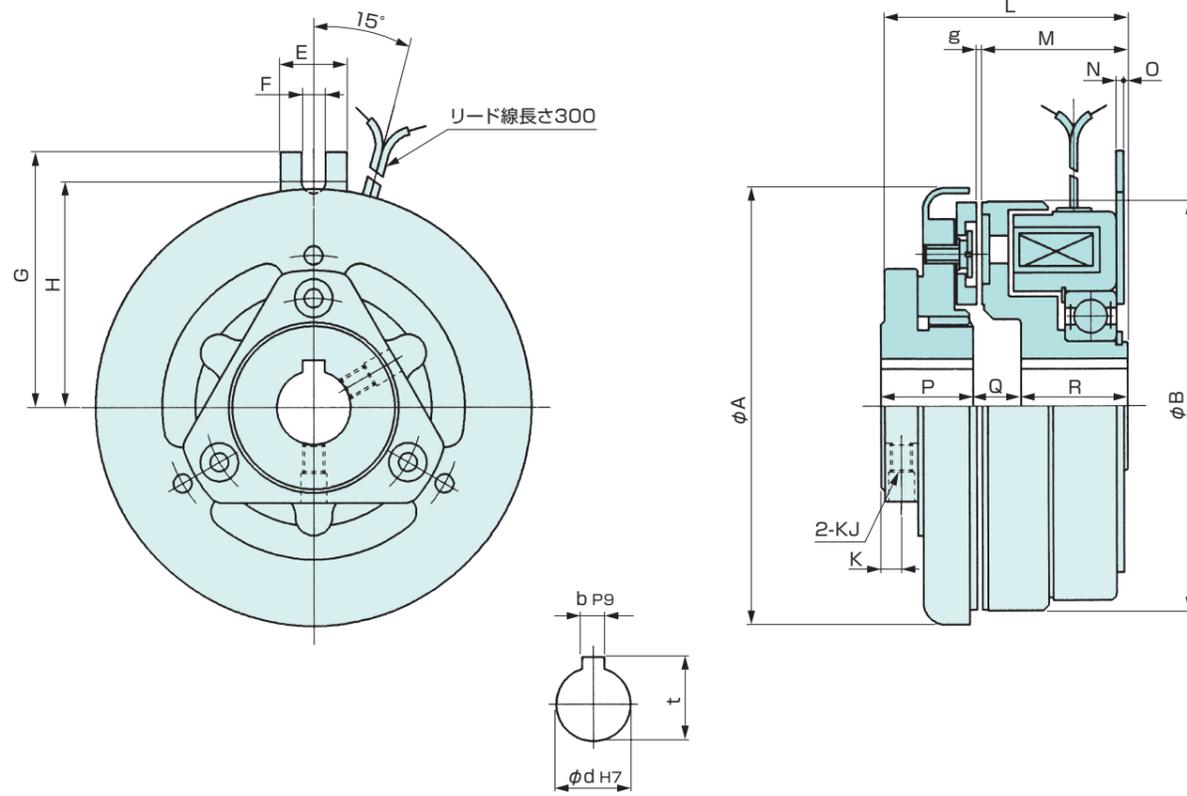

単位: mm

形 式	JCC-0.6	JCC-1.2	JCC-2.5	JCC-5	
径方向	A	76	96	118	145
	B	70.3	90.4	110.5	135.6
	E	14	16	18	20
	F	4.5	5.5	6.5	6.5
	G	46	57	69	82
	H	39.5	50	61	74
軸方向	L	48	54	67	74
	M	29	32	40.5	43.5
	N	1.6	1.6	2.0	2.6
	O	1	1	1	1


単位: mm

形 式	JCC-0.6	JCC-1.2	JCC-2.5	JCC-5	
軸方向	P	18	21	25	28
	Q	9	10	13	14
	R	21	23	29	32
	g	0.4	0.4	0.5	0.5
取付	K	4.2	4.7	5.5	6
	KJ	M4	M5	M6	M8
軸穴	d	12	15	20	25
	b	4	5	6	8
	t	13.8 ^{+0.1} ₀	17.3 ^{+0.1} ₀	22.8 ^{+0.1} ₀	28.3 ^{+0.2} ₀

突合せ軸形クラッチ

JCC-10、20、40

形 式	JCC-10	JCC-20	JCC-40
静摩擦トルク Nm	100	200	400
定格電圧 DC-V	24	24	24
消費電力 W(at75°C)	33	40	50
質 量 kg	8.7	17.5	32.5

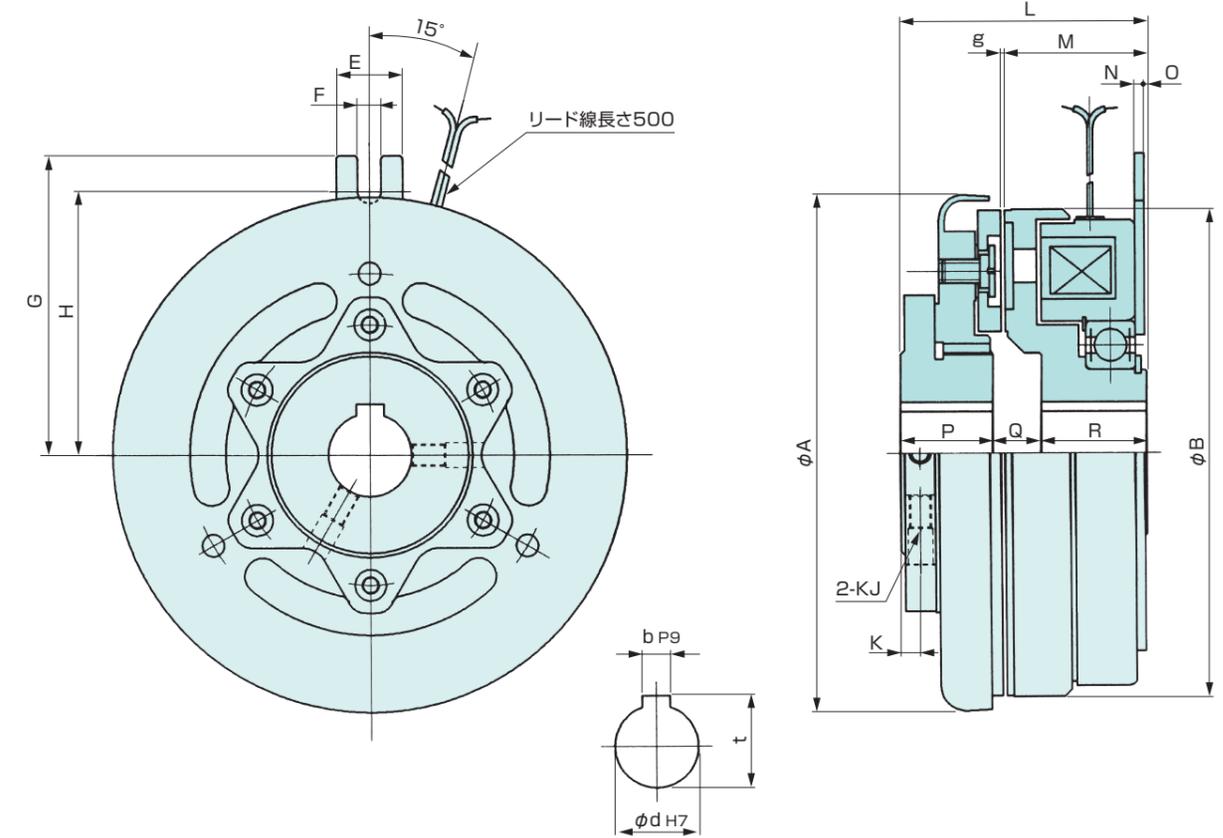

単位: mm

形 式	JCC-10	JCC-20	JCC-40	
径方向	A	186	236	288
	B	175.7	219	271
	E	24	26	30
	F	8.5	8.5	10.5
	G	108	130	160
	H	95	118	145
	L	89	108	129
	M	52	60.5	71
軸方向	N	3.2	3.2	3.2
	O	1	2	2

単位: mm

形 式	JCC-10	JCC-20	JCC-40	
軸方向	P	33.5	41.5	51.5
	Q	17.5	22	25.5
	R	38	44.5	52
	g	0.5	0.6	0.6
取付	K	7	8.5	9.5
	KJ	M8	M8	M10
軸穴	d	30	40	50
	b	10	12	16
	t	33.3 ^{+0.2} ₀	43.3 ^{+0.2} ₀	54.3 ^{+0.2} ₀