
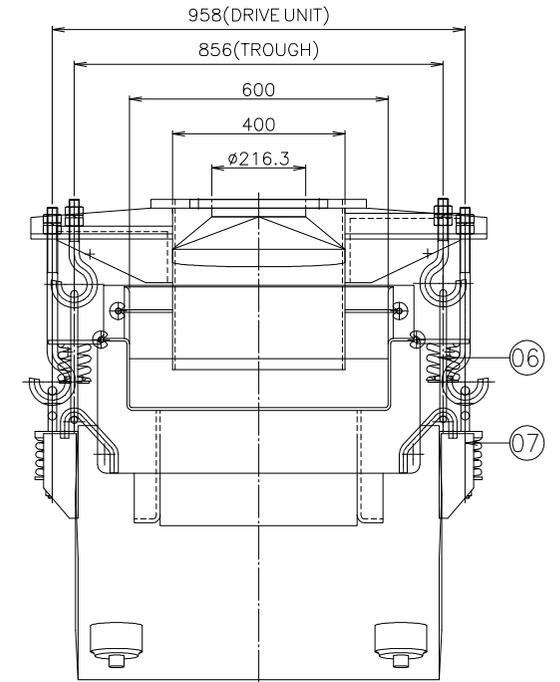


F-44BDT-UCFB6022-WS-A  
DRAWING NO.

NO.	DESCRIPTION	SPEC'	MAT'L	Q'TY	T/W	REMARK
-----	-------------	-------	-------	------	-----	--------

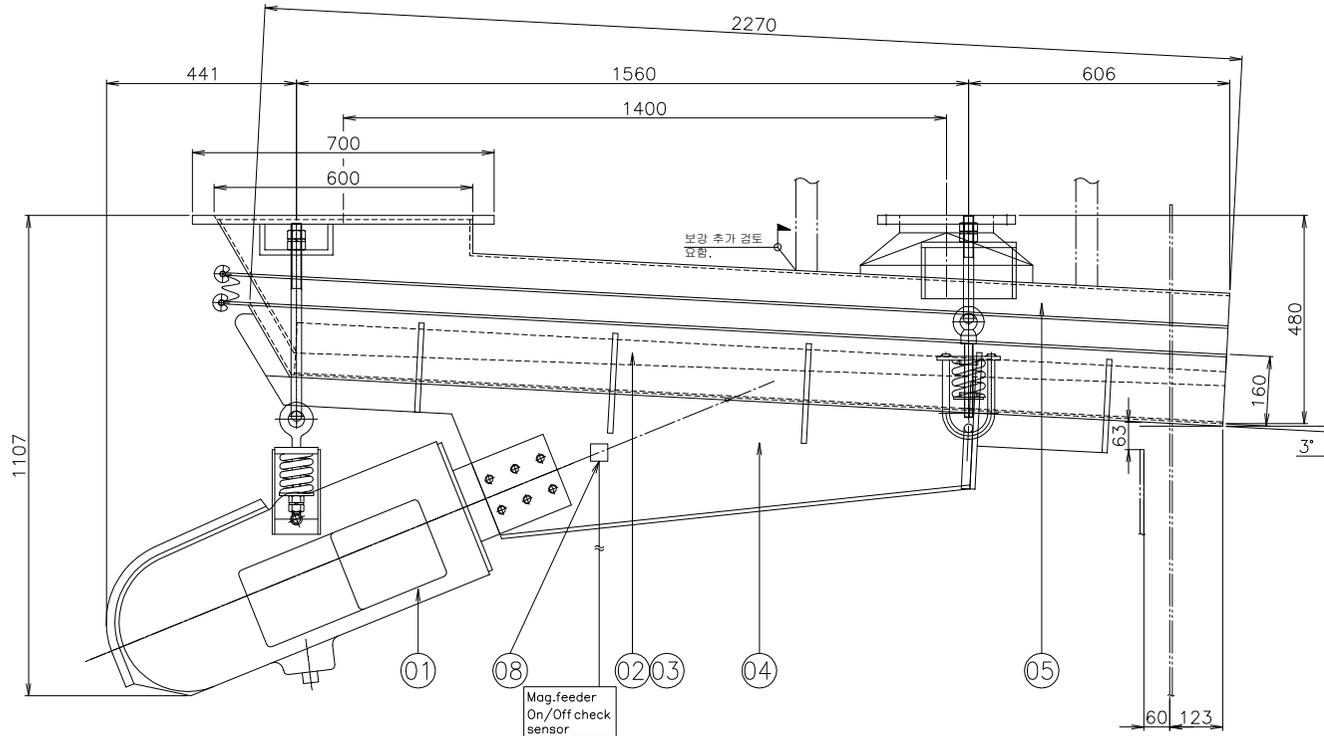

SPECIFICATION

MATERIAL TO BE HANDLED	LIMESTONE	DRIVE UNIT	F-44BDT
BULK DENSITY	1.4 T/m <sup>3</sup>	VOLTAGE	440V x 60 Hz
CAPACITY	12 Ton/Hr	VIBRATION	3600 VPM
GRAIN SIZE(mm)	-	CONTROLLER	-
MOISTURE(%)	-	Q'TY	1SET
TEMPERATURE(°C)	-	APP. WEIGHT	1,150kg

08	VIBRATING SENSOR	D7F Type	PUR'	1		SENSOR
07	HANGER ASS'Y	-	SS275	2		DRIVE
06	HANGER ASS'Y	-	SS275	2		TROUGH
05	SKIRT	-	SS275	1		
04	YOKE	-	SS275	2		
03	LINER	4t	STS304	1		
02	TROUGH	-	SS275	1		
01	DRIVE UNIT	F-44BDT	PUR'	1		SINFONIA

NO.	DESCRIPTION	SPEC'	MAT'L	Q'TY	T/W	REMARK
-----	-------------	-------	-------	------	-----	--------

CUSTOMER: 드림텍/POSCO  
NAME: F-44BDT-UCFB6022-WS  
OUTLINE DIMENSION

**SHINWHA**  
Electric Co., Ltd.

DRAWING NO. F-44BDT-UCFB6022-WS-A

APPROVED	CHECKED	DESIGNED	DRAWN	SCALE: 1/6	DATE: 2024.04.03
	NON	LEE	PARC	REV. 2	SH NO. 1 OF 1

MARK	DESCRIPTION	NAME	DATE.
	REVISIONS RECORD		